

COVERALL™

PROTECT YOUR LIFESTYLE

TEMPORARY CARPORT

Assembly Instructions



Size: 6m (l) x 3m (w) x 2.7m (h) **PLU 164891**

KEEP THIS MANUAL FOR FUTURE REFERENCE

WARRANTY

This product is guaranteed against defects for a period of **12 months from date of purchase. This warranty is provided by Super Cheap Auto Pty Ltd ACN 085 395 124 (Supercheap Auto) of 751 Gympie Rd Lawnton QLD 4501 Ph (07) 3482 7500.** Supercheap Auto will offer a repair, replacement product or store credit if the product is assessed as being defective during the warranty period.

To claim under this warranty, take this product to the Front Service Desk of your nearest Supercheap Auto store. For store locations, visit www.supercheapauto.com.au (AUS) or www.supercheapauto.co.nz (NZ). You will need your receipt or proof of purchase. Additional information may be requested of you to process your claim. Should you not be able to provide proof of purchase with a receipt or a bank statement, identification showing your name, address and signature may be required to process your claim.





This product may need to be sent to the manufacturer to assess the defect before determining any claim. Faults or defects caused by product modification, misuse and abuse, normal wear and tear or failure to follow user instructions are not covered under this warranty.





Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any expenses incurred relating to the return of this product to store will normally have to be paid by you. For more information contact your nearest Supercheap Auto store.

The benefits to the consumer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods and services to which this warranty relates.

PARTS INCLUDED:

DESCRIPTION	IMAGE	QTY.
White powder coated metal pole 99cm x 34mm dia. x 1mm		8 9 9 8
White powder coated metal pole 78cm x 34mm dia. x 1mm		8 8
Zinc plated steel peg (25cm x 7.7mm dia.)		24
White tie-down poly rope (300cm x 5mm dia.)		8

White powder coated 3-way corner		6
White powder coated 4-way corner		6
White powder coated metal base with holes for steel pegs		8
Tarp cover complete with 8 piece webbing strap with plastic hooks		1

INSTRUCTIONS:

DIAGRAM 1:

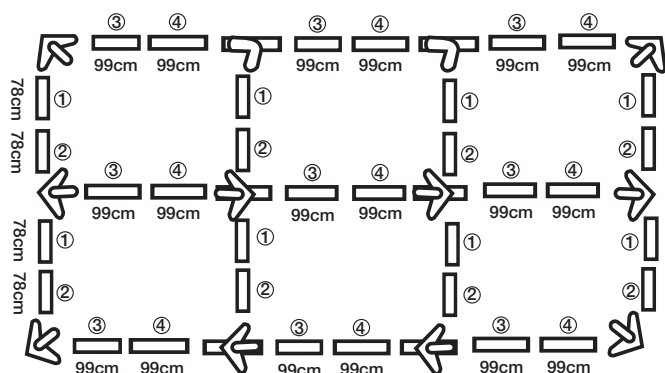


DIAGRAM 2:



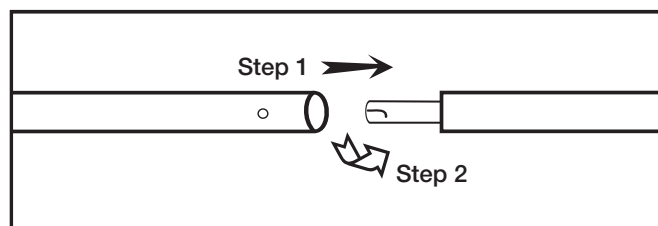


DIAGRAM 3:

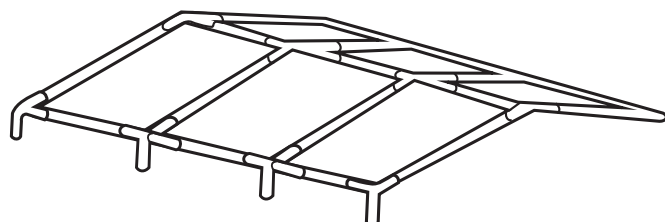

1. Place all poles and corner joiners on the ground as per diagram 1.
2. Start from the centre of diagram 1 and connect the poles together as shown in diagram 2, by pushing whilst twisting the poles together until they lock into position.
3. Place the tarp over the roof rafter. Secure the hook & loop tapes in place starting from one end (either the entry or exit) and alternating sides as you progress until completed.
4. Once the roof rafter is assembled and the tarp is secured, complete the assembly process for the legs (diagram 4).
5. Lift one side of the carport and insert the assembled legs. Repeat this process for the other side.

DIAGRAM 4:

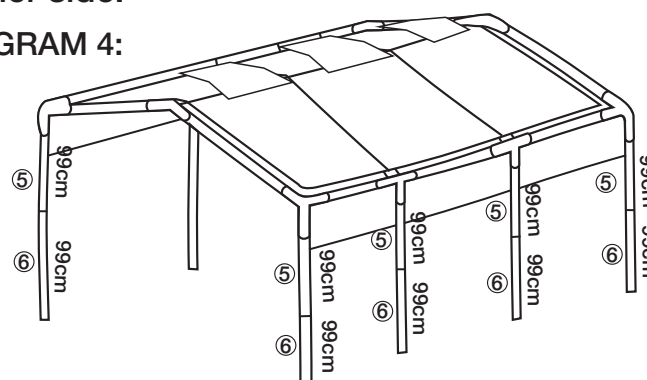

⚠ WARNING: THIS CARPORT IS DESIGNED AS A TEMPORARY STRUCTURE ONLY. IT IS RECOMMENDED THAT THE CARPORT BE DISASSEMBLED IN EXTREME WEATHER CONDITIONS SUCH AS STRONG WINDS OR STORMS. FAILURE TO COMPLY WITH THE ABOVE WARNING MAY CAUSE DAMAGE TO THE CARPORT OR VEHICLE AND WILL VOID WARRANTY.

ANCHORAGE:

To anchor the carport, attach the rope to each leg and hold in place with the pegs provided as per diagram 5.

ANCHORAGE INSTRUCTIONS:

1. Place the carport in the preferred location.
2. Secure the leg brackets in place with 2 pegs as per diagram 5.
3. Measure out from each leg 91cm and place a peg in the ground, leaving approximately 5cm between the ground and the top of the peg.
4. Secure one end of the rope to the top of a leg.
5. Tie the other end of the leg to the peg and then pull the rope tight.
6. Push the peg into the ground until the bottom of the plastic bracket is flush with the ground.
7. Repeat this process for the remaining legs.

DIAGRAM 5:


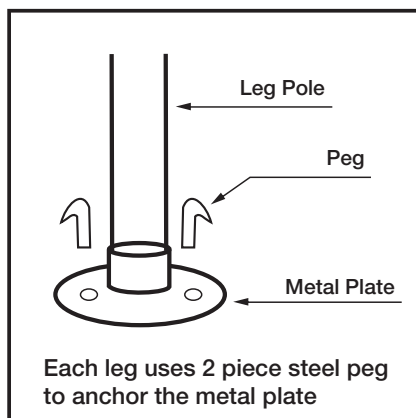


DIAGRAM 6:

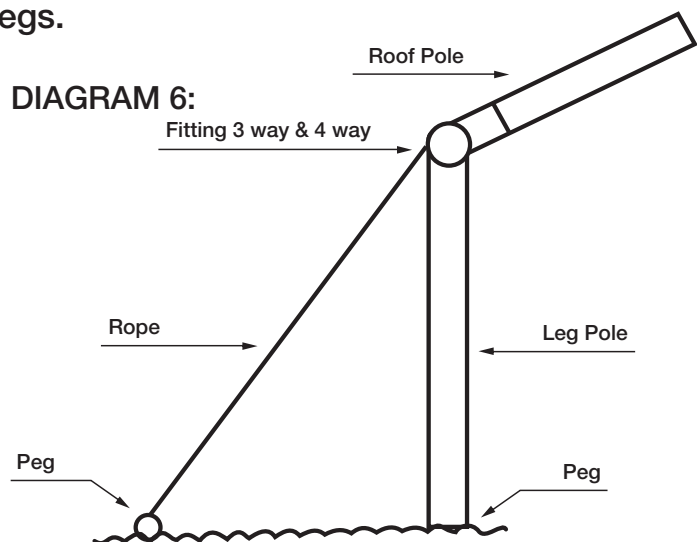

ROPE MAY NEED TO BE REPLACED PERIODICALLY