### PACKAGE CONTENTS



# Extension Light For **Plug & Glow**<sup>TM</sup> Trim Lighting System





72" Multi-Color Trim Light LED Trim Light Extension Cable

# **Instruction Manual**

# TECHNICAL SPECIFICATIONS

Working voltage: DC 12V Only


Bluetooth distance: 30ft (no obstacle)

Frequency band: 2.4 ghz


Maximum LED Trim: 4 x per Hub

Maximum amperage draw: 3A

# INSTALLATION

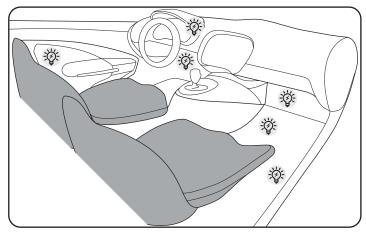

- Use the lift panel tool to increase space between panels if needed, then carefully slide trim light into the gap between interior panels.

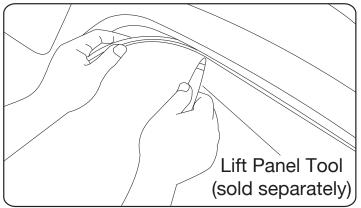

**WARNING:** Do not use lift panel tool to push against the LED Trim Light.


#### Note:

- · For use with 12V power only
- Suitable temperature for installation is 70°F (21°C) or above.


Connect the Trim Light to the Extension
 Cable



 Peel off the 3M<sup>™</sup> double-sided tape on the back of the LED emitter and place it on the dash board.




- Requires Plug & Glow<sup>™</sup> Automotive 72" Smart Trim Lighting Kit to operate
- Connect LED Trim Light with extension cable to the Smart Lighting Hub Controller.




### Note:

- For use with 12V power only
- Suitable temperature for installation is 70°F (21°C) or above.

# POWER

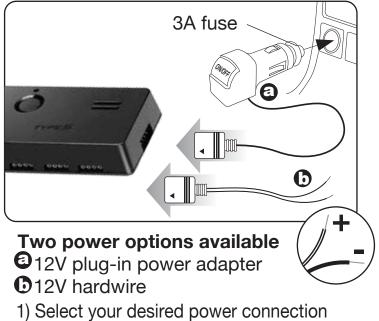

- Select your desired power connection and connect to the Plug & Glow<sup>™</sup> Smart Lighting Hub Controller
- 2) Connect LED Trim Light with extension cable to the Smart Lighting Hub Controller.

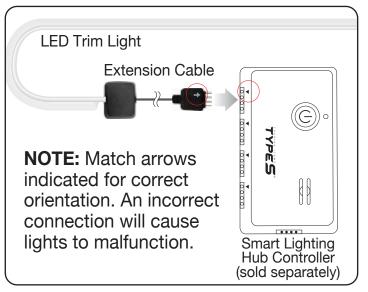

### WARNING

1. Do not install or use product if it, in any way, impairs the safe operation of your vehicle.

2. NEVER use the APP while operating your vehicle. Use the APP when vehicle is stationary only.

3. Follow manufacturer's instructions to ensure the product is properly & safely installed.

4. Check your state or provincial laws before installing. Vehicle owner must comply with all applicable laws.

5. This product is intended solely for decorative purposes. Manufacturer and Seller assume no liability for installation or use, which are solely the responsibility of the purchaser.

6. This product is not DOT approved and is designed and intended for interior uses only. Not for use in extreme temperature such as under hood applications.

7. The Manufacturer and Seller are not responsible or liable for consequential, incidental, or indirect damages, whether to person or property, resulting from the installation or improper use of this product.

**PROP 65 WARNING:** This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. **Wash hands after handling.** 

#### FCC & IC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or change to this equipment. Such modifications or change could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- · Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with

FCC RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

#### CAN ICES-3(B) / NMB-3(B)

This radio transmitter (identify the device by certification number or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are

Antenna Type	Max. Antenna Gain (dBi)
PCB printed antenna	0

Have a comment or question? Email us at: info@winplususa.com or visit us online at: www.winplususa.com

Winplus North America, Inc.
820 South Wanamaker Avenue, Ontario, CA 91761 USA
Tel: 866-294-9244
© 2016 Winplus North America, Inc.
All rights reserved.
3M™ is a trademark of 3M Company.


## **OPTIONAL ACCESSORIES**

## *TYPES* PLUG & GLOW<sup>™</sup> ACCESSORIES AVAILABLE TO TAKE YOUR EXPERIENCE TO THE NEXT LEVEL

**~ ~ ~ ~** 



USE ONLY MULTI-COLOR MICRO, PANEL & STRIP LIGHT EXTENSIONS



SPLITTERS & EXTENSION CABLES



72" SMART TRIM LIGHTING KIT

For more product and installation ideas and videos visit us at: www.winplususa.com